


Rugged double acting handpump suitable for pressures of up to 210 bar (3000 lb/sq.in)

HYDRAULIC HAND PUMP

HP2 - Handpump/ Reservoir Assembly

Reservoir	A	B
3.4 litres	198	197
4.54 litres	198	242
9.10 litres	280	287

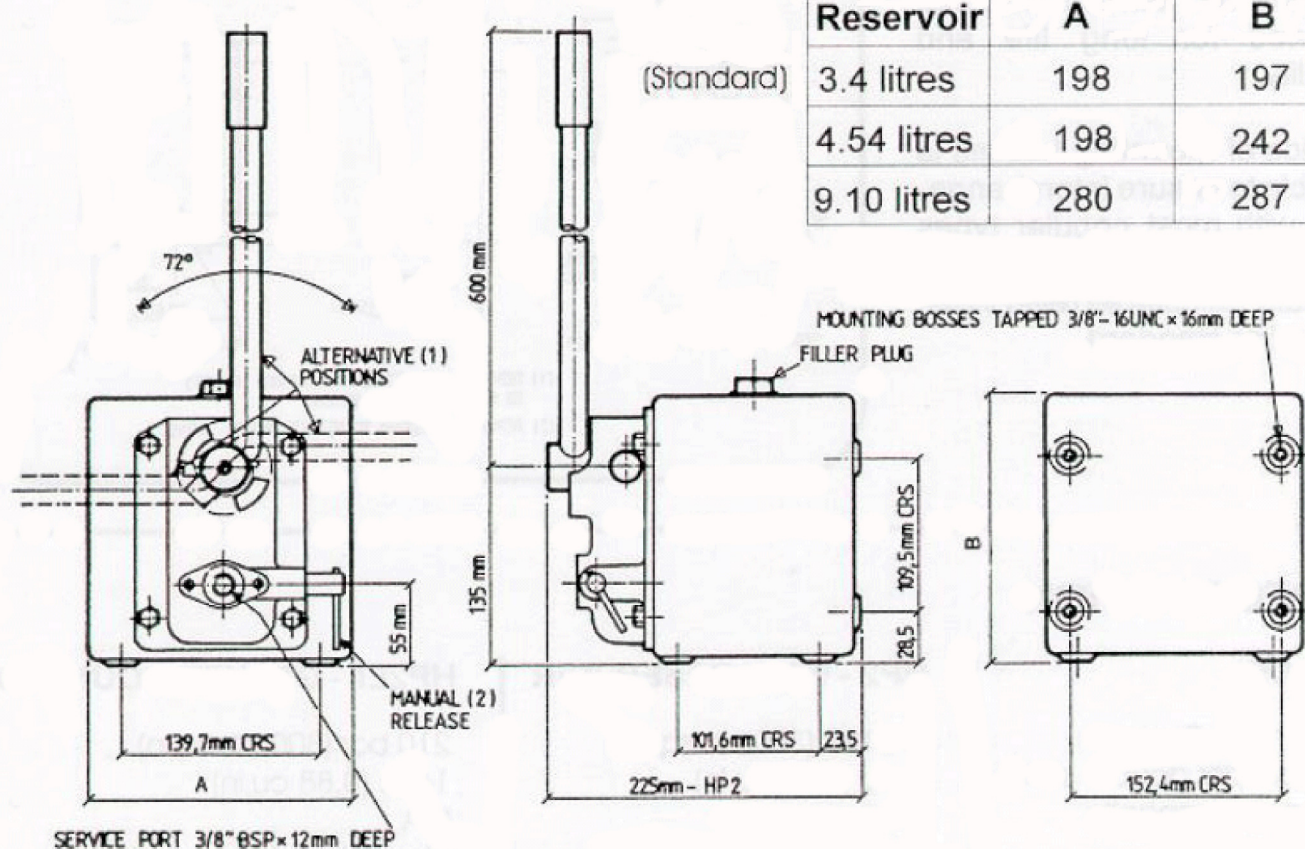

- (1) TIGHTEN GRUBSCREW INTO LEVER RECESS TO LOCK DESIRED POSITION
- (2) REMOVE CROSSPIN TO ADJUST RELIEF VALVE

- * Externally Adjustable Relief Valve
- * Totally Enclosed Mechanism
- * Virtually Maintenance Free

Head Office & Factories:

Valley Hydraulics Limited, Unit B Venture Buildings, Pendle Trading Estate,
Chatburn, Clitheroe, Lancashire, United Kingdom, BB7 4JY

Phone: +44(0)1200 440383 Fax: +44(0)1200 441628


Email: sales@valleyhydraulics.co.uk Web: www.valleyhydraulics.co.uk

The totally enclosed all weather construction of models HP2 and HP2LT series handpumps offer rugged trouble free operation in a wide variety of agricultural, industrial, mobile and mining applications.

Operating pressures of up to 210 bar (3000 lb/sq.in) are available from the double acting pump with all internal parts case hardened for long life and reliability.

A choice of mounting bosses is available to ensure interchangeability with most popular types and a manual release valve and externally adjustable relief valve are fitted as standard.

HP2LT - GASKET MOUNTED

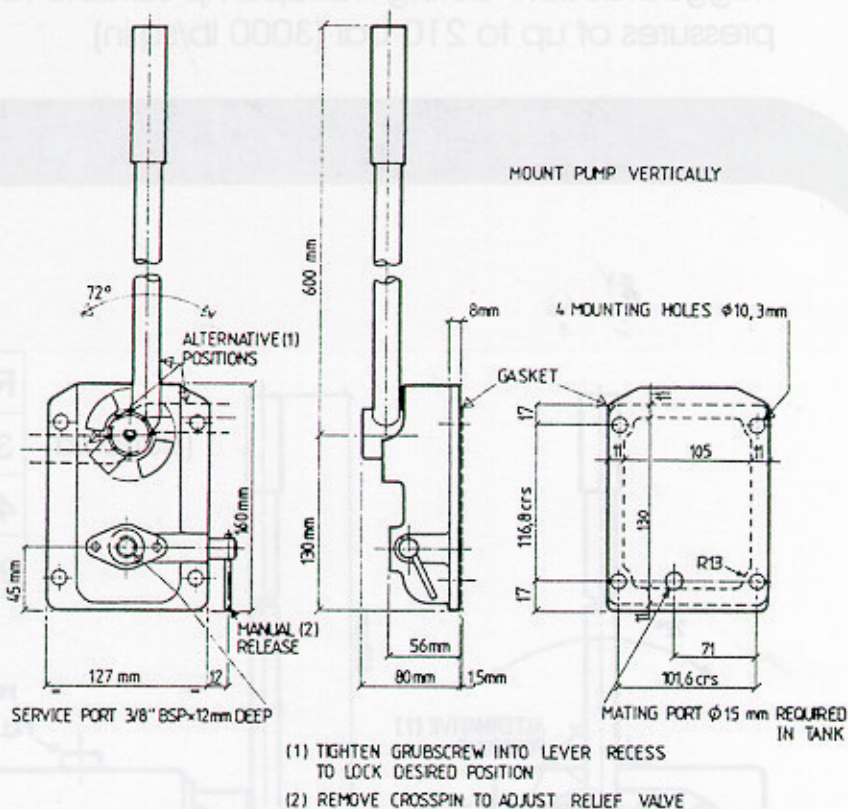

SPECIFICATION

MODEL

Maximum Pressure
Output per double stroke
Reservoir capacity
Hydraulic fluid
Dry weight
Finish

HP2 - WITH RESERVOIR

210 bar (3000 lb/sq.in)
14cc (0.88 cu.in)
3.4 litre (6 pint)
Most mineral based oils
8.5 Kg (18.75 lb)
Painted silver

HP2LT - GASKET MOUNTED

210 bar (3000 lb/sq.in)
14cc (0.88 cu.in)
N/A
Most mineral based oils
5 Kg (11 lb)
Painted silver

ORDERING DATA

Specify model and description - Standard relief valve setting 210 bar (3000 lb/sq.in)
i.e. HP2 Handpump with bolt on 6 pint reservoir. HP2LT Handpump unit only with gasket.